

EKKO®

MATERIAL HANDLING EQUIPMENT

MOVING AHEAD

COUNTERBALANCE STACKER

EK14C-130

- Load Capacity 3000 lbs.
- Lift Height 130"
- EPS (Elec. Power Steer)
- Length 118.11
- Curtis Instrument Controller
- AC Drive Motor
- Battery & Charger Included



Counterbalance Stacker




EK14C-130

Manufacturer	EKKO LIFTS	
Model		EK14-130
Power Type	Electric	
Operating Mode	Walk-behind	
Rated Load Capacity	Q (lb.)	3000
Load Center Distance	c (in)	24
Wheelbase	y (in)	44.65
Tire Type, Drive Wheel/Load Wheel	Polyurethane Tires	
Drive Wheel Size (Diameter × Width)	in	Φ9.84 x 2.76
Load Wheel Size (Diameter × Width)	in	Φ5.91 x 3.94
Number of Vehicles, x = Drive Wheel		1X+2
Mast	Double Mast	
Lowered Mast	h1 (in)	85.63
Lift Height	h3 (in)	130
Maximum Height When Mast is Extended	h4 (in)	158.66
Minimum Fork Height	h13 (in)	2.56
Overall Length	l1 (in)	118.11
Fork Dimensions	s/e/l	1.38 x 3.94 x 42.13
Fork Adjustment Range (Fork Outer Width)	b5 (in)	8.66 - 25.98
Minimum Ground Clearance at Wheelbase Center	m2(in)	1.97
Minimum Turning Radius	Wa(in)	66.34
Travel Speed, Laden/Unladen	mph	2.17 / 2.36
Lift Speed, Laden/Unladen	in/s	2.95/3.94
Climbing Speed, Laden/Unladen	%	6/10
Service Brake	Electromagnetic brake	
Drive Motor Power	kw	1.5
Lift Motor Power	kw	2.2
Battery Voltage/Rated Capacity	(V)/(Ah)	24/210
Type of Drive Control		AC
Steering Type		EPS

Counterbalance Stacker

EK14C-130LI / EK14CS-189LI

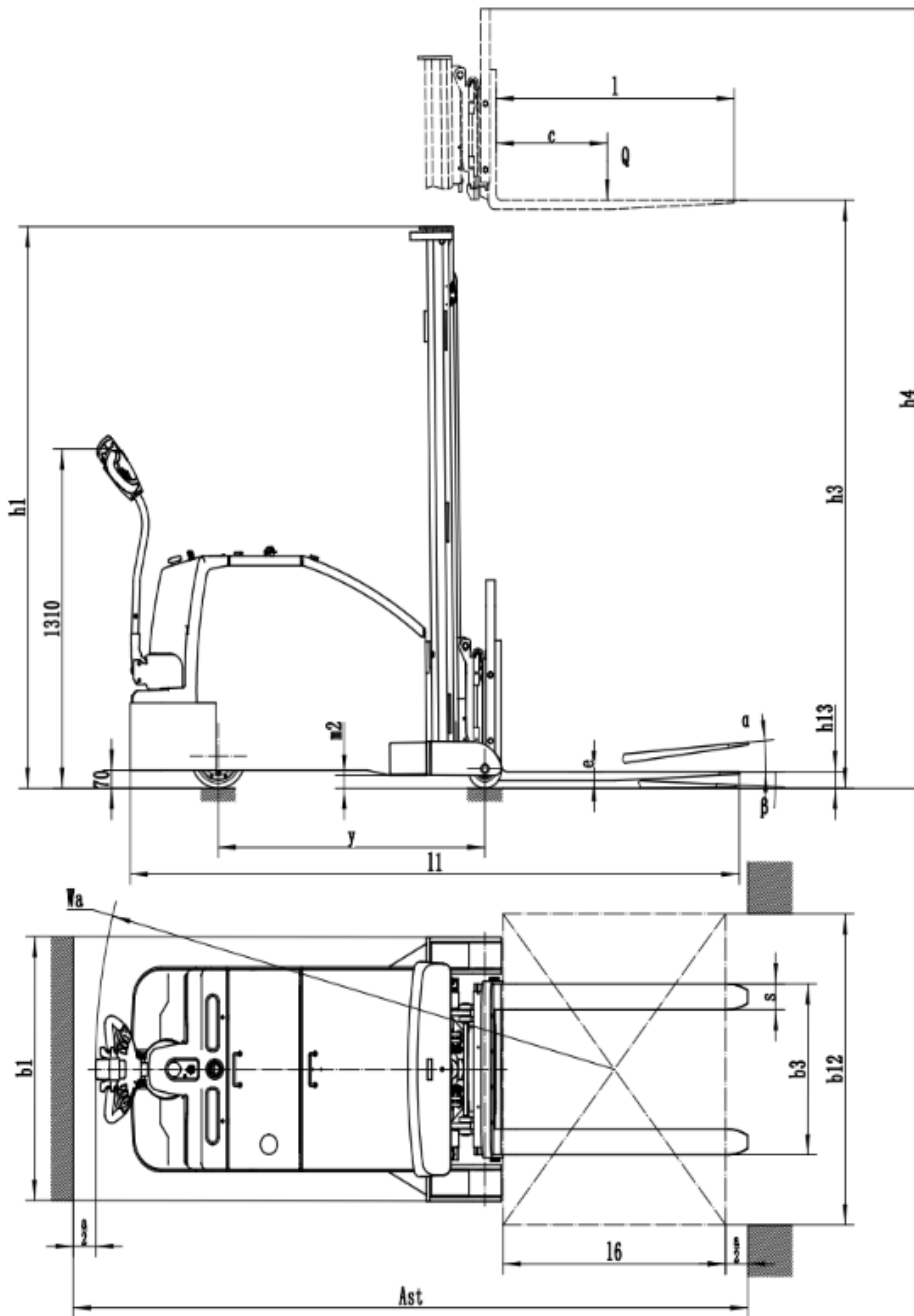

MODEL #	LOAD	MAST	LIFT HEIGHT	TOTAL LENGTH	SERVICE WEIGHT
EK14C-130	3000 lbs.	85.63"	130"	118.11"	4230 Lbs.



1761 W. Holt Ave.
Pomona, CA 91768 USA

AUTHORIZED DEALERS ONLY

www.ekkolifts.com

T: (877) 232-6517 F: (909) 222-6861