



Full Powered Lithium Pallet Jack

EPC18Li / EPC20Li / EPC25Li

- 4000 - 4400- 5000 lbs. load capacity
- Lift height 7.68"
- Forks 27x45
- Polyurethane Tires
- Lithium Battery 48V/10Ah, 48V/20Ah, 48V/30Ah
- Charger Included
- Electric Magnetic Braking



Model number		EPC18Li	EPC20Li	EPC25Li
Dynamic type		power-driven		
Type of operation		Walking type		
Rated load	Q (lbs)	4000	4400	5000
Load center distance	c (in)	24		
wheelbase	y (in)	49.8		
Dead weight (including battery)	lbs	260.2	291.2	322.2
Wheel material		Polyurethane		
Driving wheel	Φ_{xw} (in)	Φ 6.3 x 2.2		
Carrying wheel	Φ_{xw} (in)	Φ 3.1 x 2.8		
Balance wheel	Φ_{xw} (in)	Φ 2.4 x 1.6		
Number of wheels (X= drive wheels)		1X+2/4		
Lifting height	h3 (in)	7.68		
Handle height	h14 (in)	52.17		
Fork lowering height	h13 (in)	2.95/3.35		
Total length	l1 (in)	64.17		
Overall width	b1 (in)	27		
Fork size	s/e/l (in)	2.24 x 6.3 x 45.28		
The fork is wide outside	b5 (in)	21.65/26.77		
Minimum ground clearance	m2 (in)	1.1		
Turning radius	Wa (in)	58.82		
Minimum pass width (800×1200)	As1 (in)	85.2		
Minimum pass width (1000×1200)	As1 (in)	88.5		
Travel speed, full/empty	mph	2.49/2.8		
Lift speed, full load/no load	In/s	0.59/0.76		
Climbing ability, full load/no load	%	10-Jun		
Service brake		Electromagnetic braking		
Drive motor power	KW	0.85		
Boost motor power	KW	0.7		
Battery voltage/rated capacity Lithium	V/Ah	48/10	48/20	48/30
Battery weight	Lbs.	13.9	20	26.1

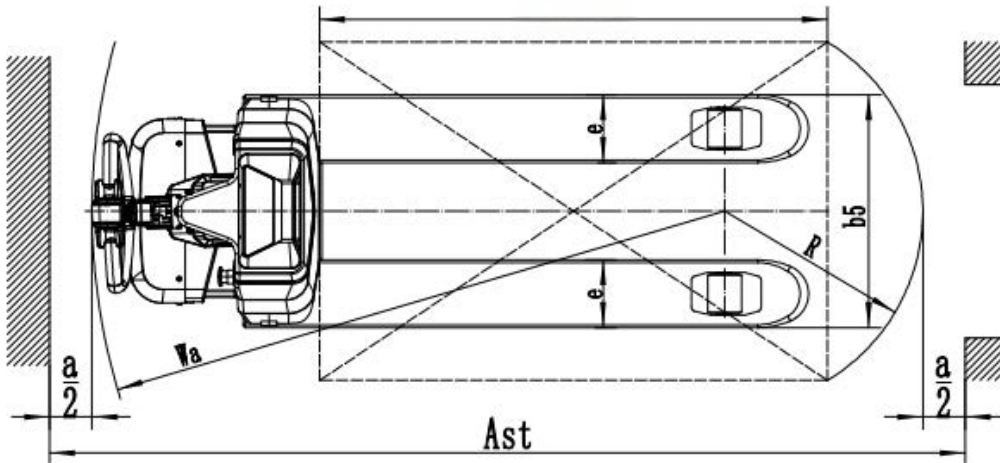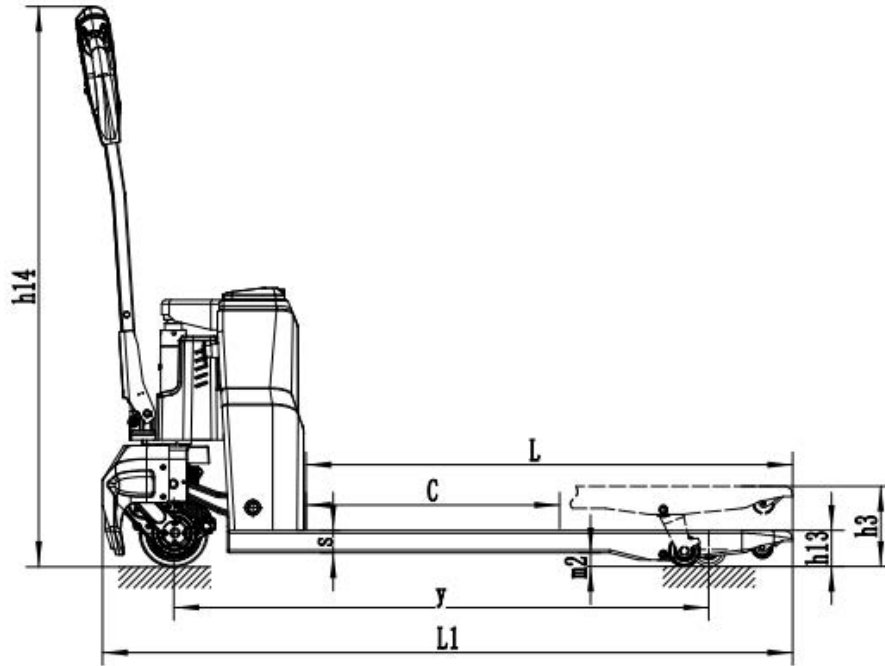

MODEL #	CAPACITY	LIFT HEIGHT	BATTERY	SERVICE WEIGHT
EPC18LI	4000 Lbs.	7.68"	24V/30Ah Lithium	260.2 Lbs.
EPC20LI	4400 Lbs.	7.68"	48V/20Ah Lithium	291.2 Lbs.