

SEMI ELECTRIC STRADDLE STACKER

EA15A / EA15A-138

- 3300 lbs. load capacity
- Lift height 118-138"
- Lowered Mast Height 85-95"
- Black Nylon Tires
- Batteries 12V/120Ah
- Onboard Charger Included
- Electric Lift
- Manual push/pull



Semi Electric Staddle Stacker




EA15A / EA15A-138

| | | |
|--|---------------------|-------------------------|
| Model | EA15A | |
| Power | ELECTRIC | |
| Operation Type | Walk-behind | |
| Rated Lifting Weight / Rated Load | Q(lbs.) | 3300 |
| Load Center Distance | c(in) | 20 |
| Wheelbase | y(in) | 53 |
| Tire Type, Drive Wheel / Load Wheel | NYLON | |
| Drive Wheel Size (Diameter x Width) | in | Φ7×2 |
| Load Wheel Size (Diameter x Width) | in | Φ3.15×2.75 |
| Number of Wheels, x = Drive Wheel | 2-Feb | |
| Height When Mast is Retracted | h1(in) | 85 / 95 |
| Lift Height | h3(in) | 118 / 138 |
| Maximum Height When Mast is Extended | h4(in) | 147 / 167 |
| Minimum Fork Height | h13(in) | 2.6 |
| Overall Length | l1(in) | 70 |
| Inner Width of Support Legs | in | 35~51 |
| Fork Dimensions | s/e/l | 1.4×4×45 |
| Fork Adjustment Width (Outer Width) | b5(in) | 8.66~32 |
| Minimum Ground Clearance at Wheelbase Center | m2(in) | 2.7 |
| Minimum Turning Radius | Wa(in) | 59 |
| Lifting Speed, Full Load/No Load | in/s | 3.3/4.3 |
| Lifting Motor Power | kw | 2.2 |
| Battery Voltage/Rated Capacity | (V)/(Ah) | Lead-acid battery12/120 |
| Charger | (V)/(A) | 12/15A |
| Steering Type | Mechanical steering | |
| Noise Level at Operator's Ear | dB(A) | <70 |

Semi Electric Staddle Stacker

EA15A / EA15A-138

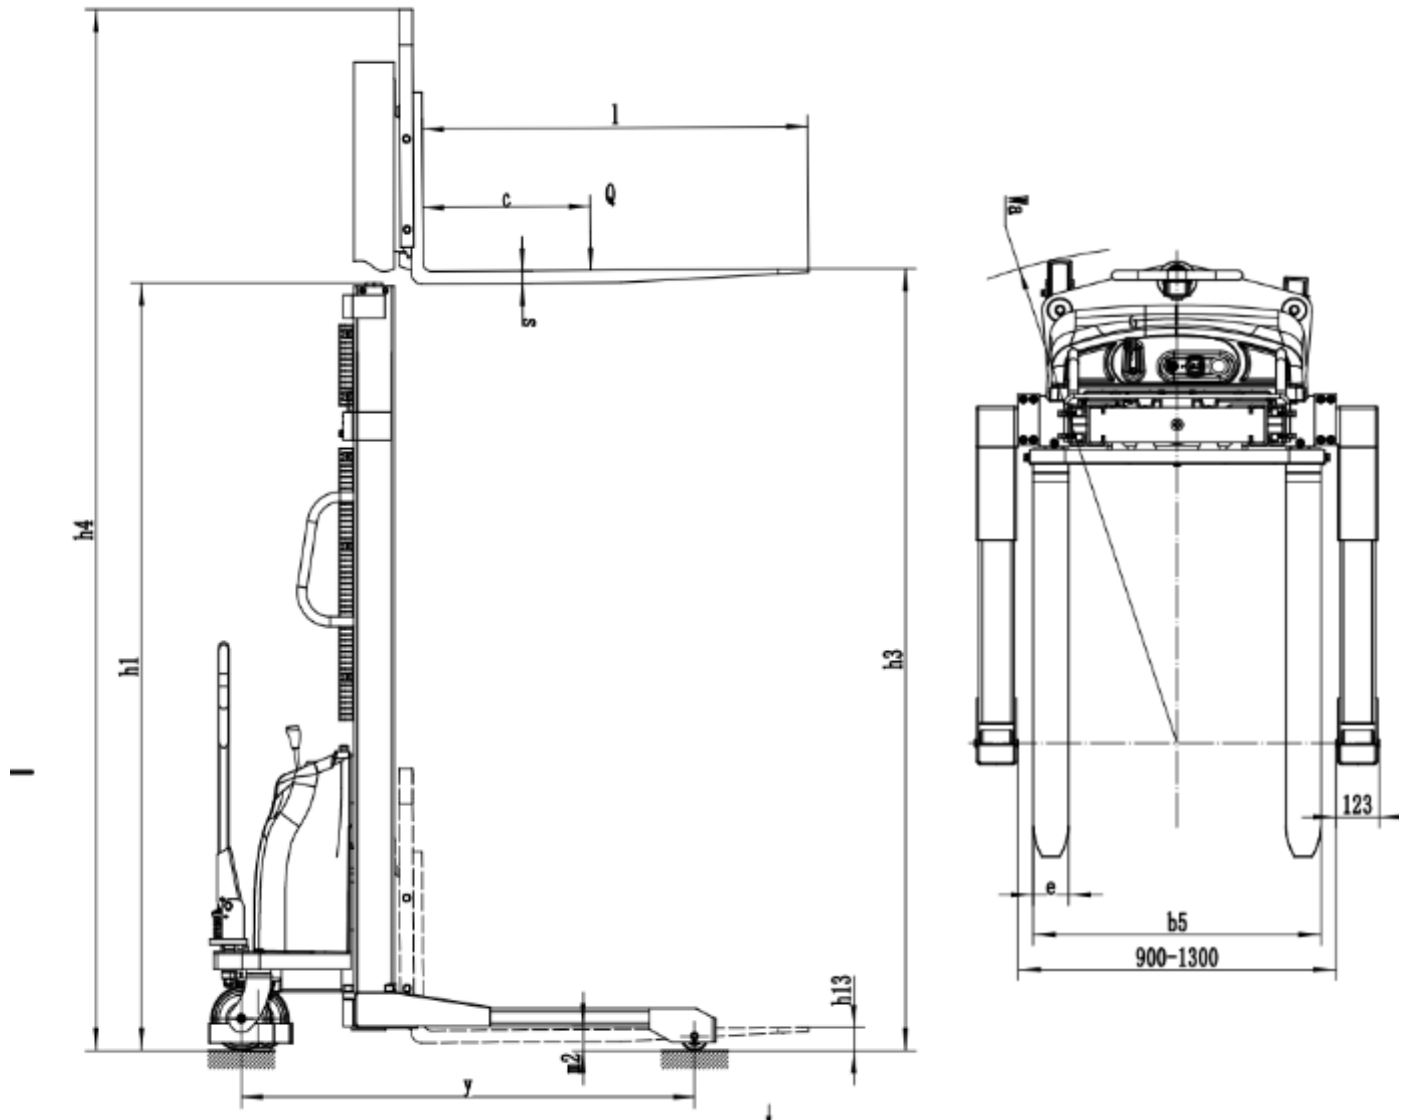

| MODEL # | MAST | LIFT HEIGHT | MAX MAST HEIGHT | SERVICE WEIGHT |
|-----------|------|-------------|-----------------|----------------|
| EA15A | 85" | 118" | 147" | 1212 Lbs. |
| EA15A-138 | 95" | 138" | 167" | 1234 Lbs. |



1761 W. Holt Ave.
Pomona, CA 91768 USA

AUTHORIZED DEALERS ONLY
www.ekkolifts.com

T: (877) 232-6517 F: (909) 222-6861